




Navigator[®]

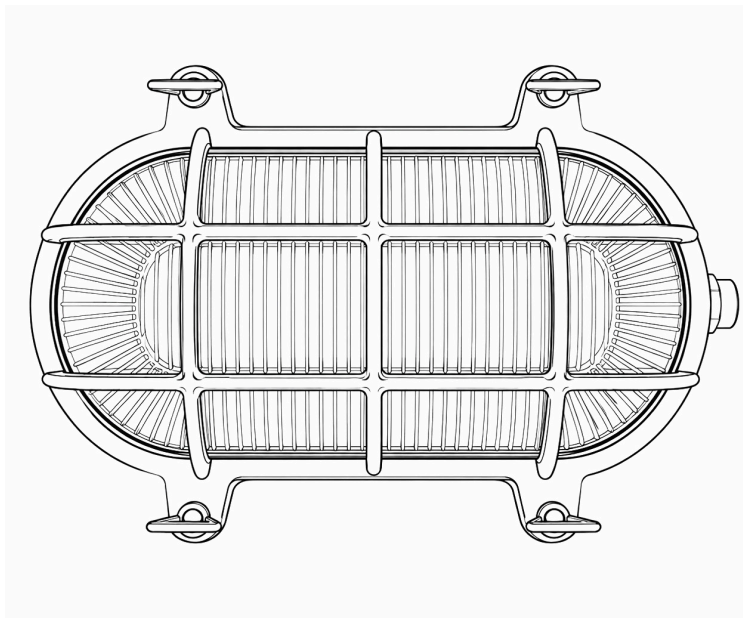

Horatio Bulkhead Installation Guide

Applies to models: 05844, 09009, 09182, 09012, 09013, 09014,
09015

Check the pack contents and read all safety information before installation.

What's in the pack

1 x complete light fitting, plus the parts shown below



1 x
Lampholder terminal cover



1 x
E27 porcelain lampholder



2 x
Wall plugs



1 x
Side-entry blanking plate + seal




2 x
Wall-fixing screws



1 x
Rear-entry cable grommet




3 x
Heat-resistant sleeves



1 x
Rear-entry blanking plug + nut/O-ring



2 x
Rubber wall-fixing seals



1 x
Side-entry cable gland + washer

Illustrations are not to scale. Some components are factory fitted.



Electrical safety

- Isolate the electricity supply. Prevent re-energisation and prove the circuit dead before beginning work.
- Installation must be carried out by a qualified electrician in accordance with current wiring regulations.
- This Class I fitting must be earthed.
- Replace broken glass immediately. Do not operate the fitting with damaged glass or seals.
- Do not exceed the marked maximum wattage. Connect to a circuit protected by a 30 mA RCD.

General information

230 V ~ 50 Hz

CLASS I


E27

IP64

For fixed wiring only. Use 3-core 1.5 mm² supply cable.
Maximum 18 W; LED recommended. Supply cable and lamp not included.


Before beginning installation, read page 2 and isolate electrical supply.

1 Open the fitting

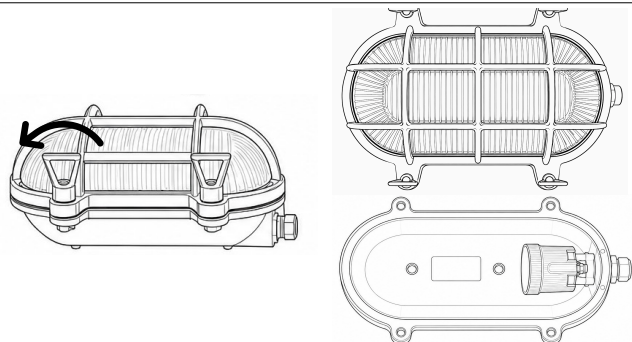


Unscrew the four wing fasteners and lift the cage-and-glass assembly away as one complete unit.

2 Choose the cable entry

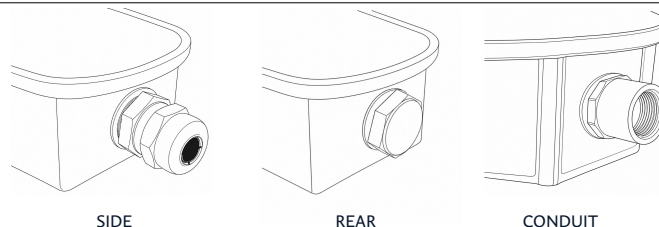


Side: use the fitted gland. Rear: remove the lampholder, exchange the brass nut and bolt for the rubber washer, then seal the side opening with the side plate and plastic seal. Conduit: replace the gland with the optional adaptor.

3 Mark and drill

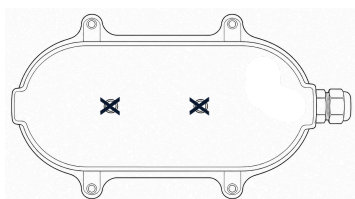


Use the rear of the base as a template. Mark the two fixing centres (marked by X), drill and fit suitable wall plugs. If cable entry is at rear, feed the cable through before fitting to the wall.

4 Mount and connect

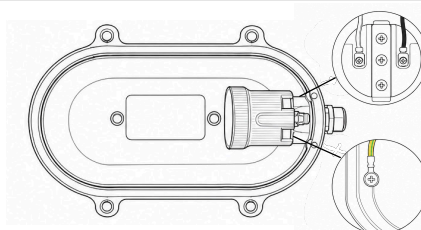


Connect the live (brown) and neutral (blue) wires to the lamp holder and the earth wire (green/yellow) to the body of the light fixture next to the earth symbol, using the supplied screw and M4 washer.

5 Fit the lamp

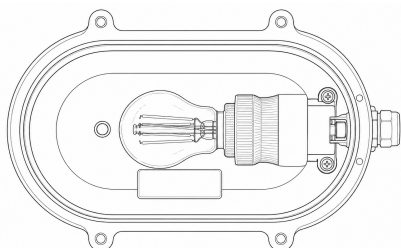

Fit an E27 lamp, maximum 18 W. LED recommended.

6 Reassemble and test



Check that the perimeter gasket is clean and correctly seated. Refit the cage-and-glass assembly, tighten all four wing fasteners evenly, restore power and test.

Please keep these instructions for future reference



Navigator Lighting (part of Lampfix)

Unit 6 Fen End, Stotfold, Hitchin,
Hertfordshire, SG5 4BA, United Kingdom

Tel: 01462 731173

Email: sales@navigatorlighting.co.uk

navigatorlighting.co.uk

For more information, please scan here



V2.0 | 29.09.2026