
Navigator®

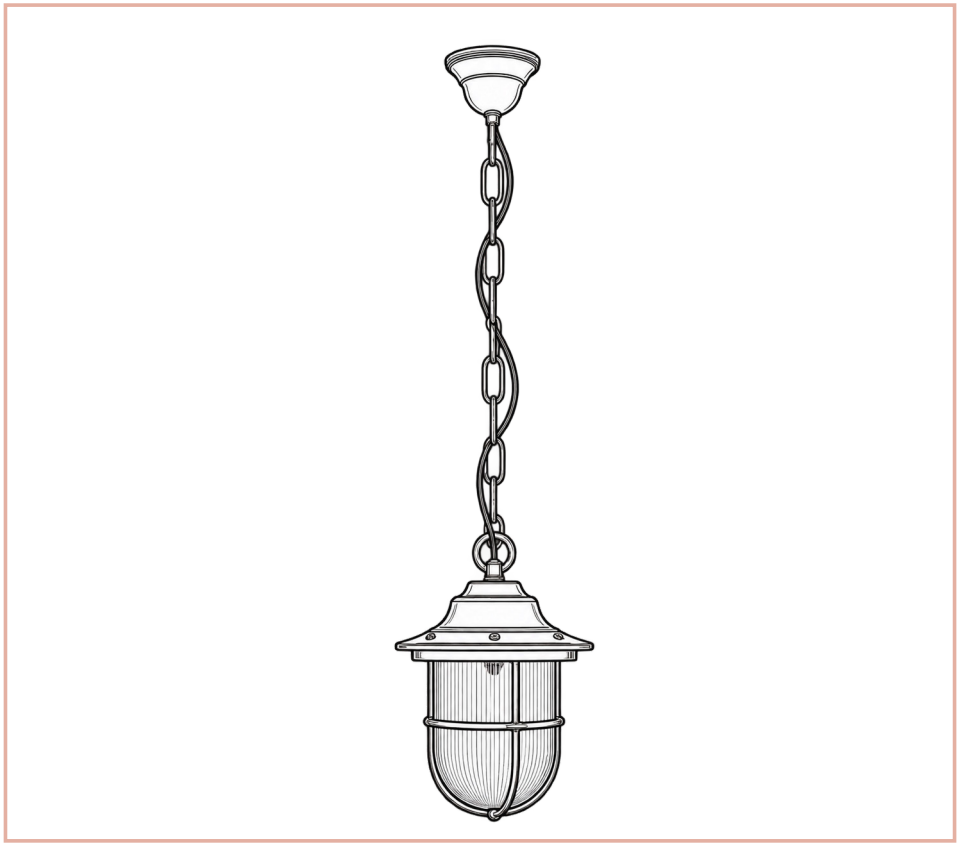

Hull Guard Pendant Lantern Installation Guide

Applies to models: 09130, 09141, 09135

Before you begin

Hull Guard Pendant Lantern: 09130, 09141, 09135

Check the pack contents and read all safety information before installation.

What's in the pack

Check all parts listed below are present.

- 1 x Solid brass lantern with matching chain & ceiling cup
- 1 x Hanging hook
- 1 x Fixing pack - 2x screws, 2x wall plugs
- 1 x Sealed 3-pole junction box
- 1 x 500 mm 3-core cable (pre-wired)
- 1 x E27 lampholder (pre-fitted)

Electrical safety

- Isolate the electricity supply. Prevent re-energisation and prove the circuit dead before beginning work.
- Installation must be carried out by a qualified electrician in accordance with current wiring regulations.
- This Class I fitting must be earthed.
- Replace broken glass immediately. Do not operate the fitting with damaged glass or seals.
- Do not exceed the marked maximum wattage. Connect to a circuit protected by a 30 mA RCD.

General information

230 V ~ 50 Hz	CLASS I	E27 (ES)	IP54

For fixed wiring only. Use 3-core 1.5 mm² supplied cable.

Lamp not included.

Navigator®

Instructions

Hull Guard Pendant Lantern: 09130, 09141, 09135

Before beginning installation, read page 2 and isolate the electrical supply.

1 Mark and drill

Mark the fixing positions on the ceiling. Drill and fit the supplied fixings, making sure they are suitable for the mounting surface.

2 Fit the hanging hook

Secure the supplied hanging hook to the ceiling using the fixing pack.

3 Set the chain and route cable

Hang the lantern from the hook. Adjust the chain to the required drop and route the fitting cable through the chain and ceiling cup.

4 Connect the supply

Using the supplied sealed junction box, connect brown to L, blue to N and green/yellow to Earth. This Class I fitting must be earthed.

5 Secure the ceiling cup

Raise the ceiling cup over the electrical connection and secure it in position.

6 Fit the lamp

Unscrew the cage and carefully remove the glass. Fit an E27 lamp, maximum 18 W, then refit the glass and cage securely.

7 Restore the supply and test

Check the hook, chain, ceiling cup and glass are secure. Restore the electricity supply and test the fitting.

Navigator Lighting accepts no responsibility for injury or damage resulting from incorrect installation or use.
This Class I fitting must be earthed. If in doubt, consult a qualified electrician.

Please keep these instructions for future reference.

Navigator®

For more information, please scan here

Navigator Lighting

Unit 6 Fen End, Stotfold, Hitchin,

Hertfordshire, SG5 4BA, United Kingdom

Tel: 01462 731173

Email: sales@navigatorlighting.co.uk

navigatorlighting.co.uk

V2.0 02.10.2026