


TECHNICAL DATASHEET

Multi-conductor flexible cable insulated in PVC • 105 °C • cULus

Product range: SPT-2 | Lampfix part codes: 01788, 01789

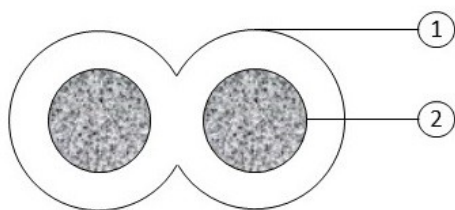

CABLE CONSTRUCTION

1. PVC SPT-2 insulation
2. Tin-plated copper conductor

cULus file no. E495477

Characteristics

Working voltage	300 V
Working temperature	105 °C

Product specification

Lampfix part code	Conductor size [AWG]	Conductor stranding [No. × mm]	Shape	Outer dimensions [mm]
01788	2 × 18	49 × 0.15	Flat	3.6 × 7.2 ± 0.2
01789	2 × 18	49 × 0.15	Flat	3.6 × 7.2 ± 0.2

Material and application

Applicable standards	UL 62 / UL 1581; CSA 22.2
Conductor	Tin-plated copper conductor
Insulation	PVC SPT-2 105 °C type insulation
Cable size	2 × 18 AWG
Application	Flexible cord

Drum traceability

Date of manufacture	_____
Original issue number	_____
Date of respool	_____

Technical information may be updated without notice. Please confirm the current specification before use.