




Metalbrite Pendant Installation Instructions

*Applies to all pendants in the Metalbrite Pendant range, including the Mini Metalbrites.
09213, 05707, 06464, 06193, 05709, 05705, 05710, 09214, 06192, 09705, 09707, 09072,
09073, 09075*

Step 1

Start with the live feed. Ensure it is switched off at the mains. Test the cable end is not live. If in any doubt about wiring consult a qualified electrician.

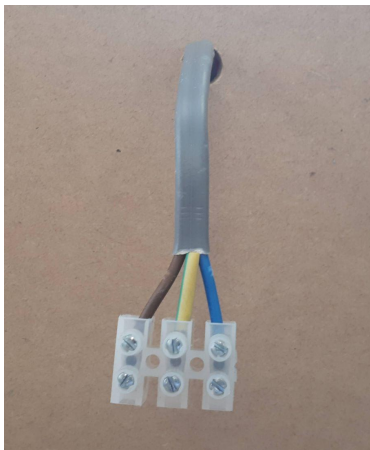

Step 2

Detach the bracket from the pendant rose by undoing the grub screws

Address (HQ & Warehouse): Quintex & Lampfix, Unit 6 Fen End, Stotfold, Hitchin, Herts. SG5 4BA

Tel: 01462 731 173 | Fax: 01462 731 120 | Email: mail@lampfix.co.uk | Website: lampfix.co.uk

Lampfix



Step 3

Fix the bracket to the ceiling next to the feed.




Step 4

Use 2 fixings compatible with the ceiling type.

Address (HQ & Warehouse): Quintex & Lampfix, Unit 6 Fen End, Stotfold, Hitchin, Herts. SG5 4BA

Tel: 01462 731 173 | Fax: 01462 731 120 | Email: mail@lampfix.co.uk | Website: lampfix.co.uk

Lampfix

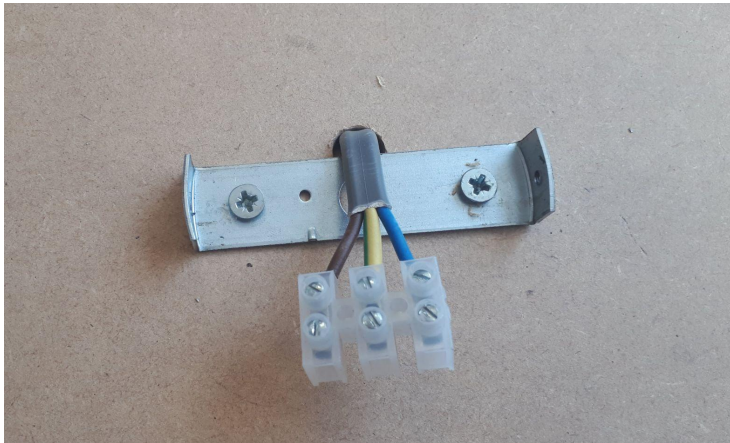

Step 5

Connect the 3 cores from the pendant to the feed. The pendant cores are colour-coded: Live is brown, Neutral is blue and Earth is green/yellow. They must match the feed.




Step 6

Feed the wire up into the ceiling as much as possible. Push the terminal block up towards the bracket. Position metal pendant rose cover plate over the bracket, with the grub screw holes lining up.

Address (HQ & Warehouse): Quintex & Lampfix, Unit 6 Fen End, Stotfold, Hitchin, Herts. SG5 4BA

Tel: 01462 731 173 | Fax: 01462 731 120 | Email: mail@lampfix.co.uk | Website: lampfix.co.uk

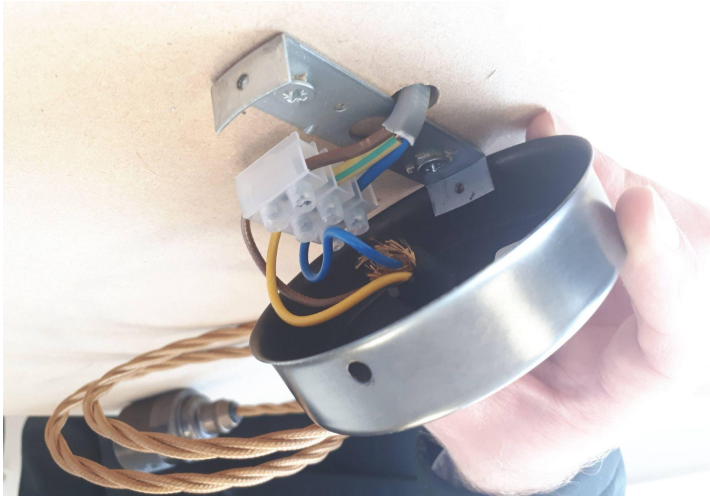

Step 7

Tighten the first grub screw through the plate into the bracket.



Step 8

Tighten the second grub screw on the other side of the bracket.

Lampfix



Step 9

The pendant is now ready for use. You can test it and fit the lamp.



If in any doubt about wiring consult a qualified electrician.

Address (HQ & Warehouse): Quintex & Lampfix, Unit 6 Fen End, Stotfold, Hitchin, Herts. SG5 4BA

Tel: 01462 731 173 | Fax: 01462 731 120 | Email: mail@lampfix.co.uk | Website: lampfix.co.uk



Address (HQ & Warehouse): Quintex & Lampfix, Unit 6 Fen End, Stotfold, Hitchin, Herts. SG5 4BA

Tel: 01462 731 173 | Fax: 01462 731 120 | Email: mail@lampfix.co.uk | Website: lampfix.co.uk